

LUBING

***Drinking nipple
for calves, cattles and bulls***



***With the drinking nipples
Item 6006 / 6006-02 / 6026***

Drinkers for calves, cattles and bulls

The LUBING drinking nipples are animal friendly designed. An operation is only possible if the nipple has been taken fully into the mouth.

It consists of a brass valve body, opening lever, spring, throttle screw and a stainless steel point.

The amount of drinking water can be easily adjusted at the throttle screw.

The nipple can directly connected to the water supply up to maximum of 6 bar.

For the installation, normally on the back wall, the 45°-

bracket Art. 6202 can be used.

However the installation position of 45 °, as well as the corner distance of 30 cm must be maintained. Thus injuries are avoided and safe water supply is guaranteed.

Products



Bracket Item 6202



Nipple Item 6006-2




Nipple Item 6006



Nipple Item 6026

Installation example

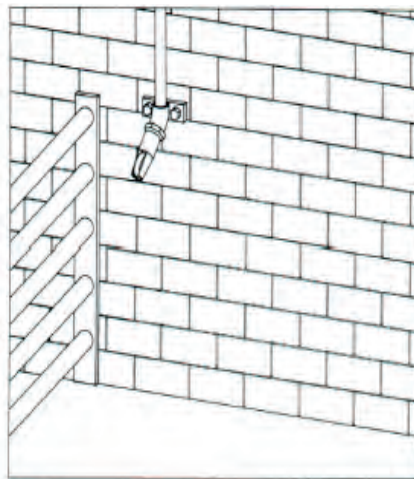

The advantages:

- Very low cost
- Easy installation
- Valve replaceable- without disconnecting pipework
- Noiseless, non-splashing water outlet, therefore animals will not be frightened
- No water hammer in the water pipe
- Long durability
- No contaminants
- No splashing water
- Decreased liquid manure

Technical data

Height of installation

Bull fattening: approx. 1,30 m

Jung cattle: 0,9-1,2 m

Calve fattening: 0,8 m

Gradient of installation: 45°

Connecting thread: R1/2"

Flow rate: 2 - 11 l/min

Water pressure: max. 6 bar

For further information: www.lubing.com

Technical modifications reserved.

LUBING

**Drinking-Systems
Climate-Systems**

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf (Germany)

Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33

www.lubing.com · info@lubing.com