
SELECTION



Matching LUBING drinking nipples

LUBING TOP-Nippel (1 4022) or TOP-Combinipple (2 4024-00) with sidewards actuation.



For specific requirements

For specific requirements Hygiene-optimized LUBING CombiMaster (4050-00) with wider housing and lower pin and lower screw-in depth.

VERSIONS

3 meter elements with the TOP-Nippel Item 4022

| | Nipples per element |
|-----------|------------------------|
| Item 4038 | 08 |
| Item 4037 | 10 |
| Item 4036 | 12 |
| Item 4039 | 15 |
| Item 4051 | 18 |
| Item 4052 | 20 |

3 meter elements with the TOP-Combinippel Item 4024-00

| | Nipples per element |
|-----------|------------------------|
| Item 4032 | 08 |
| Item 4033 | 10 |
| Item 4034 | 12 |
| Item 4035 | 15 |
| Item 4061 | 18 |
| Item 4062 | 20 |

Hygiene-optimized Version with NEW CombiMaster Item 4050-00

| | Nipples per element |
|-----------|------------------------|
| Item 3060 | 12 |
| Item 3061 | 15 |
| Item 3062 | 18 |
| Item 3063 | 20 |

Recommended number of birds per nipple* TOP-Nippel + TOP-Combinippel: Recommended number of birds per nipple* CombiMaster: 8-12 Birds/nipple

Finishing up to 2 kg: 10-15 Birds/nipple · Finishing up to 3 kg: 8-12 Birds/nipple

*The number of animals per nipple has to be reduced for heavy birds, in hot climates and in dependence of the light-/water programme! Pay attention to national / regional regulations! Broilers finishing up to 3 kg need Starter cups in the last two weeks. Recommendation: 2 pcs. per element

LAYOUT


We recommend a drinking line every 2,5 to 3,5 m width of a house. Fundamentally, there should always be installed one more drinking line than feeding lines

| | Front connection (sketch below left) | max.length (m) | Middle connection (sketch below right) | max.length (m) |
|--|--------------------------------------|-------------------|--|-------------------|
| Pressure regulator E-Flush | Item 3251-00 | 60 ** | Item 3251-02-00 | 120 ** |
| Pressure regulator E-Flush with actuator | Item 3251-01-00 | 60 ** | Item 3251-03-00 | 120 ** |
| Ball tank | Item 4221-00 | 60 ** | Item 4223-00 | 120 ** |

programme the length of line has

Front connection



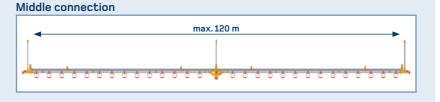

Maximum 3 m distance between suspensions.

SUITABLE COMPLEMENT







Top-Climate-systems for poultry

LUBING

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf

4+49(0)5442-9879-0 +49(0)5442-9879-33

www.lubing.com · info@lubing.com



FLOOR-WATERING SYSTEM

FOR BROILERS



system

LUBING FLOOR-WATERING SYSTEM FOR BROILERS

LUBING Drinking-Systems are proven and successfully used hundreds of thousand times for the optimal water supply of your animals in all types of housing. Due to their modular design, they can be expanded and supplemented at any time. With the patented and world-leading LUBING nipples, they form the optimum solution for efficient, animal welfare and hygienic poultry management.

All LUBING floor–watering systems consist of the following components:

The main water supply prepares the drinking water with filtration, regulates the inlet pressure, the addition of medication if necessary and measures the water consumption.

The treated water is supplied into the drinking line via **pressure regulators** or **ball tanks** with integrated flushing equipment.


Fully **automatic flush breather** units are installed at the end of each drinking line. At regular intervals, the drinking elements are fitted with suspensions that are connected to the central hoisting cable. The system height can be very finely regulated via hand- or ceiling winches, and the complete line can be raised to ceiling height for cleaning operations.

The core of the systems are the **LUBING drinking nipples**, which are available with or without drip cup in many variants. The supplied LUBING height table indicates the perfect height of the drinking line and the water column at each time. This ensures dry litter with an optimal water supply at the same time - from day one!

ADVANTAGES

OF THE LUBING FLOOR-WATERING SYSTEMS

- modular design: replacement, maintenance and extension of all elements easily possible
- many compatible supplementary and extension products for effective poultry house automation (*) back side)
- sturdy, proven and durable system
- ideal for particularly hygienic and animal welfare housing
- LUBING Drinking-Systems in world-wide known and uncompromising quality

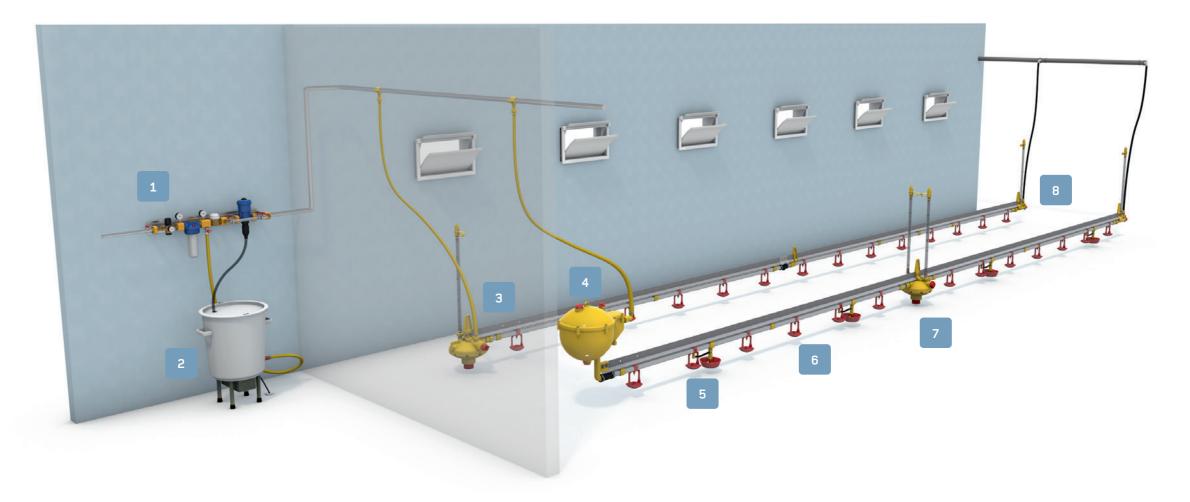



Main water supply

- available in many variants and diameters
- measures, filters, tests and doses in one compact module
- solid flange connections



Mixer

- homogeneous mixing of the stock solution
- permanent circulation prevents the active ingredients from settling on the bottom



Pressure regulator Optima E-Flush

- stepless adjustment of the water column
- automatic flushing with the actuator



Ball tank

- alternative to pressure regulator – constant 20 cm water column
- integrated flushing device



Starter Cup

- use for fattening up to 3 kg in the last two weeks
- optimal distribution: 2 pieces per element




Drinking nipple

- easy and all around accessible operation (360°)
- use from the first day



Slope regulator

- compensation of height differences
- adjustable from 10 45 cm



Flush breather unit

- works fully automatic without additional power supply
- significantly reduces the amount of required work for flushing processes

